

# L1 L1 | HANGING LIGHTS



## CATEGORY

LED Hanging Lights

## LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)  
20 Year Warranty  
We run our fixtures **40% cooler** than LM-80 testing standards




BR

SSA

## SPECIFICATIONS

| APPLICATION   | CONSTRUCTION                      | DRIVER SYSTEM   | INPUT POWER | INSTALLATION                      | LEAD WIRES   | CRI | CERTIFICATION                               |
|---|-----------------------------------|-----------------|-------------|-----------------------------------|--|-----|---|
| Up Light<br>Shadowing<br>Wall Wash<br>Silhouette<br>Architectural Accents | 6061 Aluminum<br>C360 Solid Brass | Internal Driver | 10.5-18 VAC | High Performance<br>High Pressure | ULECC 18<br>AWG Tinned<br>Copper Wire<br>15ft Length | 80  | UL1838<br>Low Voltage<br>Landscape Lighting |

## PRODUCT DIMENSIONS

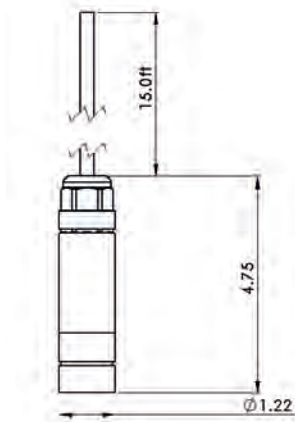

## EQ / WATTS / VA / LUMENS

EQ / W / VA / LM

**20 - 2W/5VA - 230lm**

## BEAM SPREAD & FINISH

| BEAM SPREAD              | FINISH  |
|--------------------------|---|
| 12°<br>25°<br>40°<br>60° | C360 Solid Brass (BR)<br>Stainless Aluminum (SSA) |

## POWER CONSUMPTION

| COLOR TEMPERATURE | VA |
|-------------------|----|
| 3000K             | 5  |
| 2700K             | 5  |
| 5000K             | 5  |
| AMB*              | 6  |
| BLU               | 5  |
| RBL               | 5  |
| GRN               | 5  |
| RED*              | 4  |

INDICATES STOCKED ITEMS

## ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- \*Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

## PHOTOMETRICS

\*Complete IES files furnished upon request.

## FEATURES

- Compression lens technology; no glue
- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver



OLUTRON



BUILT IN THE USA

