



DECK LIGHT CURVE DLC | DECK LIGHT




CATEGORY

LED Deck Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)
20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards



SSA



AB



BLK




WHT

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Decks Railings Wall Mount Step Lighting Fences	6061 Aluminum	Internal Driver	10.5-18 VAC	Mounting Bracket Included	UL1015 22 AWG Tinned Copper Wire 60 Inch Length	80	UL1838 Low Voltage Landscape Lighting

PRODUCT DIMENSIONS

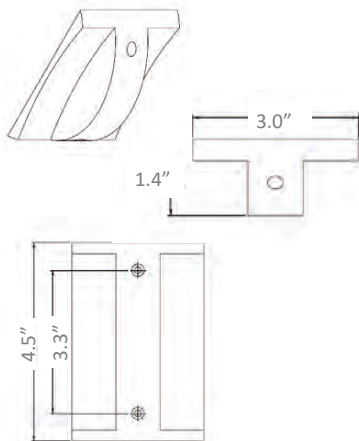

EQ / WATTS / VA / LUMENS

EQ / W / VA / LM

20 - 2W/5VA - 115lm

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
130°	Architectural Bronze (AB) Black (BLK) Stainless Aluminum (SSA) White (WHT)

POWER CONSUMPTION

COLOR	TEMPERATURE	VA
■	3000K	2
■	2700K	2
■	5000K	2
■	AMB*	1
■	BLU	2
■	RBL	2
■	GRN	2
■	RED*	1

■ INDICATES STOCKED ITEMS

PHOTOMETRICS

*Complete IES files furnished upon request.

FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

