



MINI WELL LIGHT

MWL HP | WELL LIGHT



CATEGORY

LED Well Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty

We run our fixtures **40% cooler** than LM-80 testing standards




BR

SSA

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Up Light Shadowing Wall Wash Silhouette Architectural Accents	6061 Aluminum C360 Solid Brass	Internal Driver	10.5-18 VAC	High Performance High Pressure	ULECC 18 AWG Tinned Copper Wire 46 Inch Length	80	UL1838 Low Voltage Landscape Lighting IP66

PRODUCT DIMENSIONS

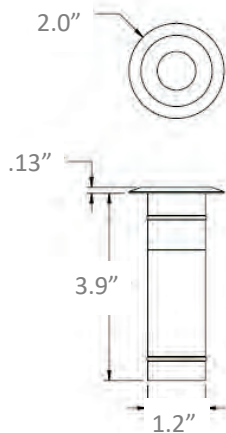

EQ / WATTS / VA / LUMENS

EQ / W / VA / LM

20 - 2W/5VA - 230lm

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
12° 25° 40° 60°	C360 Solid Brass (BR) Stainless Aluminum (SSA)

POWER CONSUMPTION

COLOR TEMPERATURE	VA
3000K	5
2700K	5
5000K	5
AMB*	6
BLU	5
RBL	5
GRN	5
RED*	4

INDICATES STOCKED ITEMS

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

PHOTOMETRICS

*Complete IES files furnished upon request.

FEATURES

- Compression lens technology; no glue
- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver



OLUTRON



BUILT IN THE USA

