

X-LIGHT SINGLE SIDE X-LIGHT ONE | PATH LIGHT



CATEGORY

LED Path Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards




BR

SS

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Pathway Wall Scones Patios Docks Driveways	H59 Cast Brass 316 Stainless Steel	Internal Driver	10.5-18 VAC	Surface plate included	SJEOOW 18 AWG Tinned Copper Wire 60 Inch Length	80	UL1838 Low Voltage Landscape Lighting IP66

PRODUCT DIMENSIONS

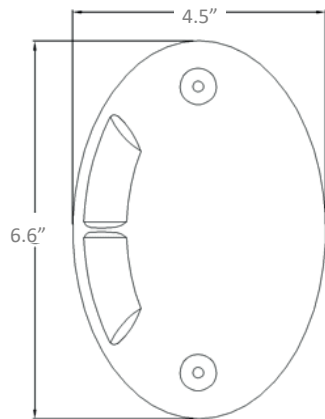

EQ / WATTS / VA / LUMENS

EQ / W / VA / LM
20 - 2W/3VA - 90lm

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
Diffused Non-Diffused	H59 Cast Brass (BR) Stainless Steel (SS)

POWER CONSUMPTION

COLOR TEMPERATURE	VA
3000K	4
2700K	4
5000K	4
AMB*	3
BLU	4
RBL	4
GRN	4
RED*	3
INDICATES STOCKED ITEMS	

PHOTOMETRICS

*Complete IES files furnished upon request.

FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information



OLUTRON



BUILT IN THE USA



Garden Light LED | A Fixture for Life | 6112 Benjamin Road | Tampa, FL 33634 | 1.800.511.2099 | 813.901.5595

*IN A CONTINUING PRODUCT IMPROVEMENT PROGRAM, GARDEN LIGHT LED RESERVES THE RIGHT TO MODIFY PRODUCT SPECIFICATIONS WITHOUT NOTICE.