

P9

P9 | PATH LIGHT



A FIXTURE FOR LIFE

CATEGORY

LED Path Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty


We run our fixtures **40%** cooler than LM-80 testing standards



SPECIFICATIONS

| APPLICATION | CONSTRUCTION | DRIVER SYSTEM | INPUT POWER | INSTALLATION | LEAD WIRES | CRI | CERTIFICATION |
|---|----------------------------|-----------------|-------------|--------------------------------|---|-----|---|
| Pathway Walkway Patios Small Areas | 6061 Aluminum Raw Brass | Internal Driver | 10.5-18 VAC | LV130 Ground Stake included | ULECC 22 AWG Tinned Copper Wire 46 Inch Length | 80 | UL1838 Low Voltage Landscape Lighting |

PRODUCT DIMENSIONS

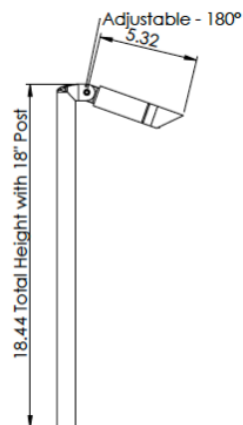

WATTS / VA / LUMENS

WATTS / VA / LUMENS

20 - 2W/5VA - 230lm

BEAM SPREAD & FINISH

| BEAM SPREAD | FINISH |
|-------------|--|
| Flood | Architectural Bronze (AB) Black (BLK) Raw Brass (BR) Stainless Aluminum (SSA) |

POWER CONSUMPTION

| COLOR | TEMPERATURE | VA |
|-------|-------------|----|
| ■ | 3000K | 5 |
| ■ | 2700K | 5 |
| ■ | 5000K | 5 |
| ■ | AMB* | 5 |
| ■ | BLU | 5 |
| ■ | RBL | 5 |
| ■ | GRN | 5 |
| ■ | RED* | 5 |

■ INDICATES STOCKED ITEMS

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

PHOTOMETRICS

*Complete IES files furnished upon request.

FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver
- Lumen levels- fixtures tested with shrouds



LUTRON



BUILT IN THE USA
UNPRECEDENTED 20 YEAR WARRANTY



Powered By