


Surface | Micro Series Specialty Light

PRODUCT DESCRIPTION

Ideal for step lighting, wall mounts, retaining walls, dock posts and pilings.

The **SURFACE LED** luminaire is carefully engineered to perfectly illuminate steps while the innovative mount provides a +-16° rotation to ensure a level installation.

PRODUCT DIMENSIONS & BEAM SPREAD

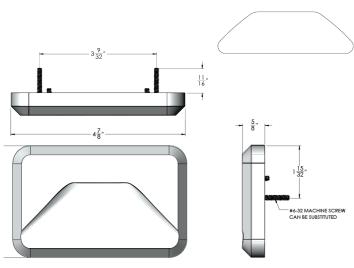

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
 - Built in surge protector.
 - IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- Construction: 6061 aircraft-grade aluminum
- Finishes: Stainless Aluminum (SSA),

Black (BLK) *Special Order

- Lead Wire: 90" 22 AWG tinned copper
- Mounting: Bracket included
- Driver System: Internal
- Operating Voltage: 10.5-18 VAC
- CRI: 80+
- Beam Spread: 100°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS



WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

Intertal

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com