




P10 Dual | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas, while also perfect for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

P10 Dual – The P10 Dual brings powerful versatility with two integrated LEDs and 140° of adjustability. Whether you're lighting a path, washing a wall, or doing both at once, this fixture adapts to your needs with style and ease.

PRODUCT DIMENSIONS & BEAM SPREAD

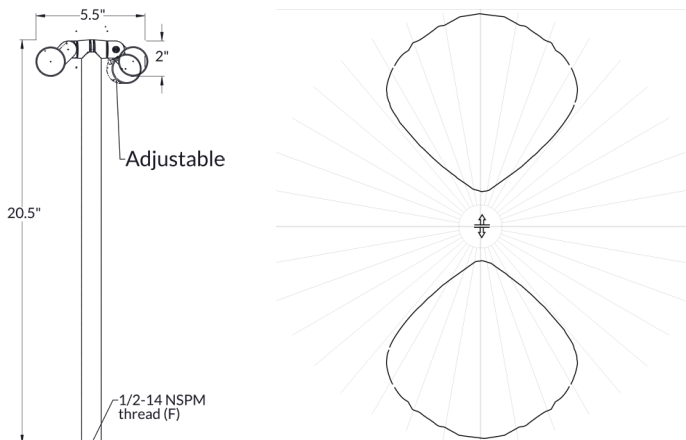

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum.
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- Tempered glass.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK)
- **Lead Wire:** 27" 18 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** Flood



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	4W	10VA	160LM X 2

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
- Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com