




P9 Dual | Path Light

PRODUCT DESCRIPTION

Ideal for pathways, walkways, patios, and small areas—while also delivering versatile performance for uplighting, shadowing, wall washing, silhouetting, and architectural accents.

P9 Dual – Inspired by the original P9, the Dual version delivers double the output with the same sleek design. Use it to highlight walkways, combine up and downlighting, or add depth to landscape elements. With fully integrated LEDs and 180 degrees of adjustability.

PRODUCT DIMENSIONS & BEAM SPREAD

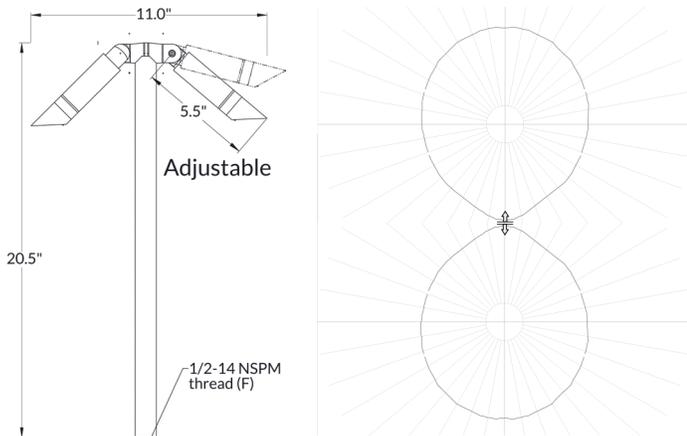

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum
- U.S.A. made light engine and driver.
- Built in surge protector.
- Adjustable knuckle for ease of light positioning.
- IP66 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum
- **Finishes:** Architectural Bronze (AB), Black (BLK)
- **Lead Wire:** 46" 22 AWG tinned copper
- **Mounting:** 8.5" LV131 ground stake
- **Lens:** Clear flat
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 60°



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	4W	10VA	230LM X 2

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
- Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

*Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.

IES files can be found at www.gardenlightled.com