

Light measurement report

Laboratory results

Print date 12-06-2026

Laboratory and Equipment

Test lab	GLLED
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	5/26/2026

Measurement Conditions

Tested c-planes	16
Tested gamma angles	73 – 2.50°
Input Power	2 W


Tested Light Source

Luminaire	ROCK BLK 30K
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	GARDEN LIGHT LED

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	93.4 lm – 0.8185% / 99.18%
Efficiency	46.7 lm/W
Peak Intensity	67.29 cd
Correlated Color Temperature, CCT	2700 K
Color Rendering Index	CRI 85.0

Polar light distribution diagram

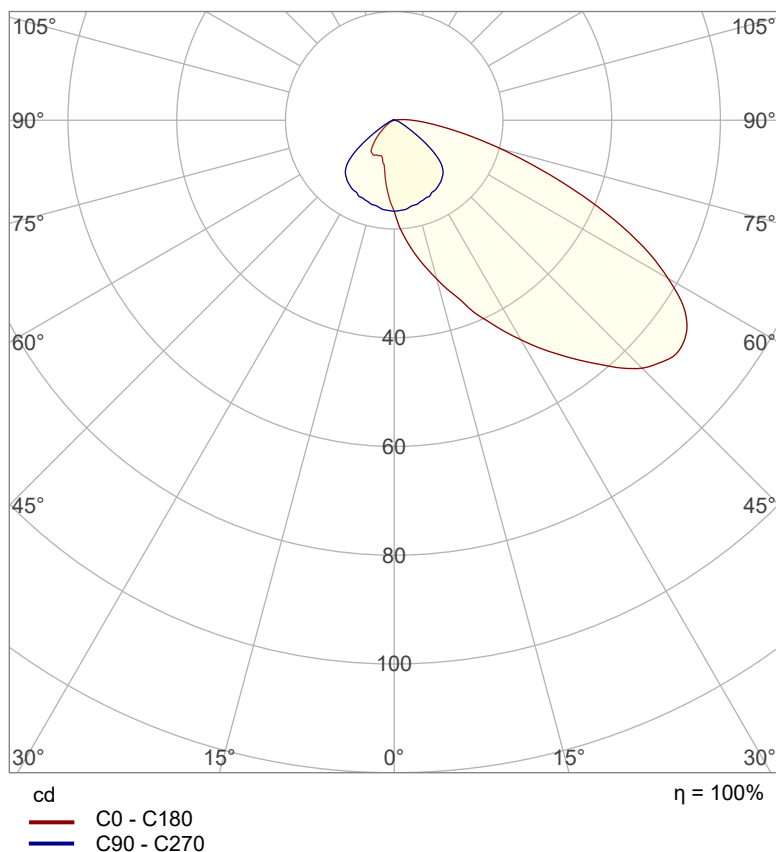


Light measurement report

Laboratory results


Print date 12-06-2026

Beam details

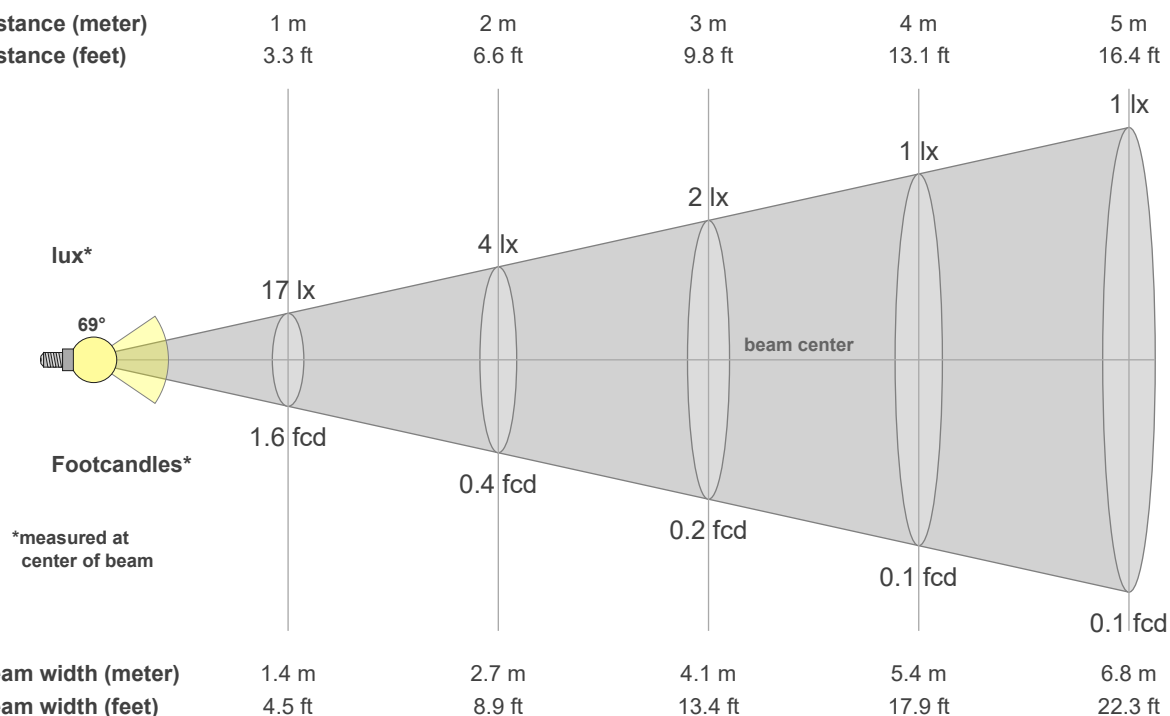


Luminaire budgetary diagram


LAMPS (number of lamps)

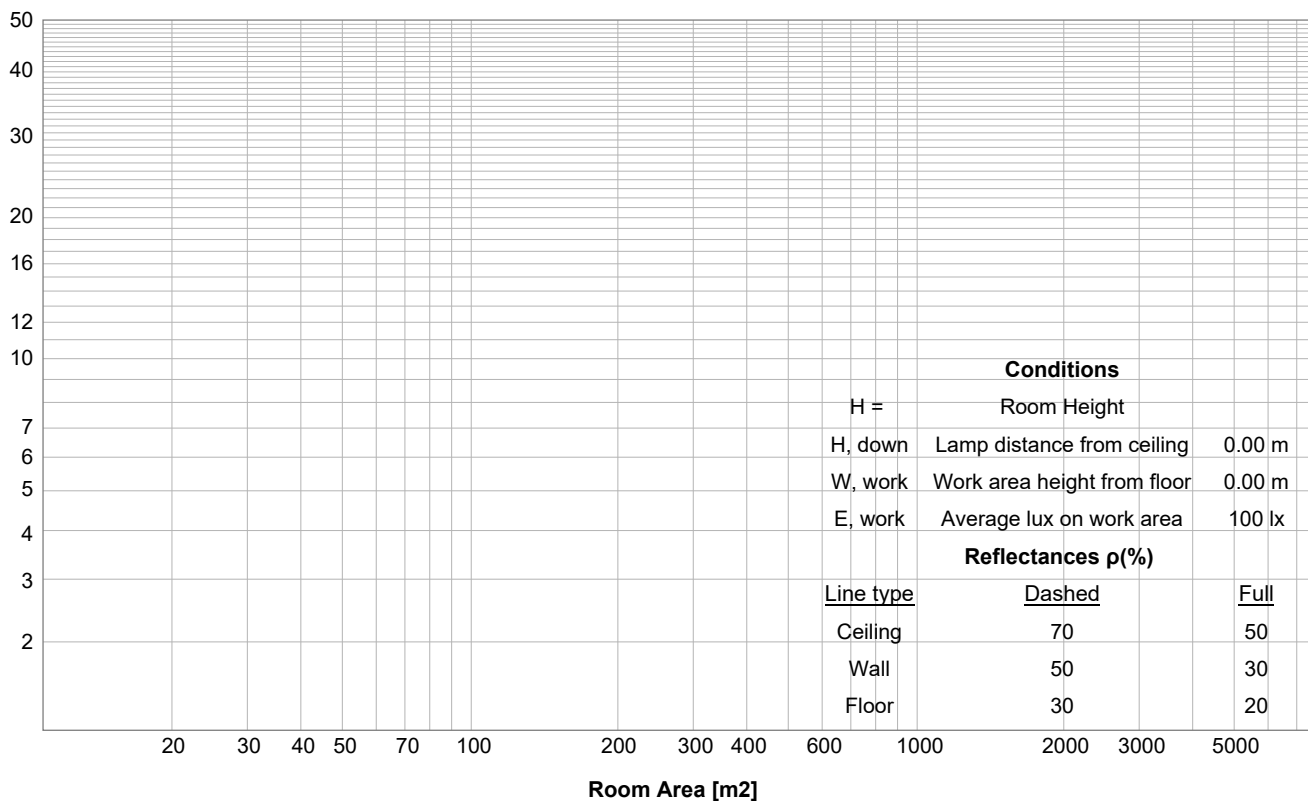


Iso-intensity Diagram (Iso-candela)

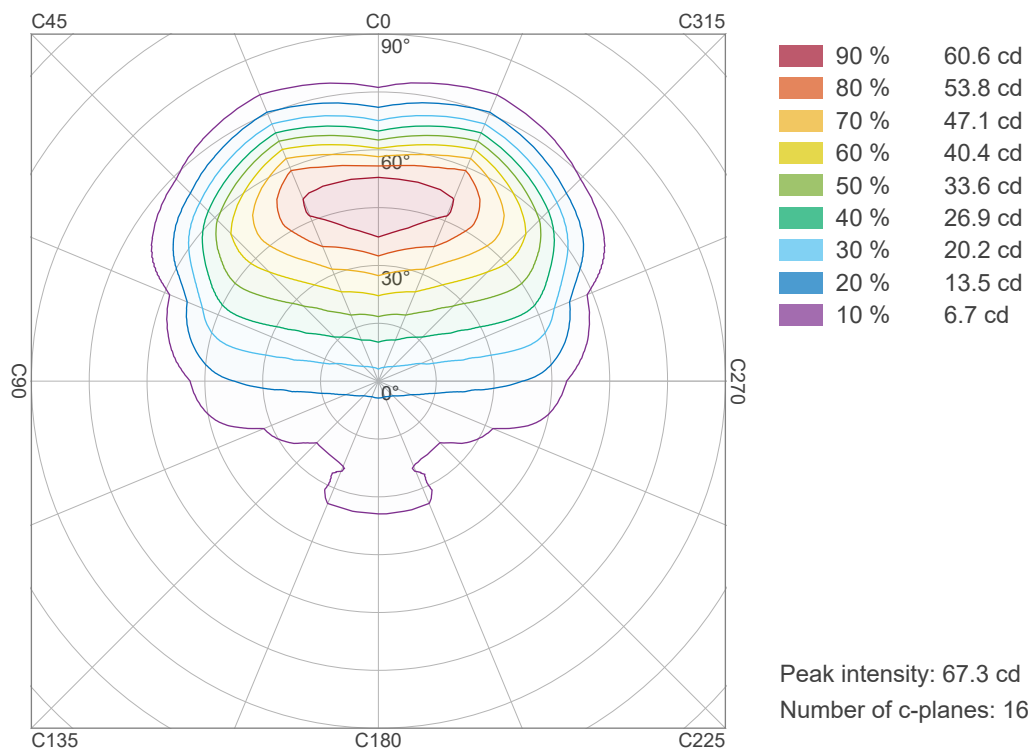

Iso-illuminance Diagram (Iso-lux)

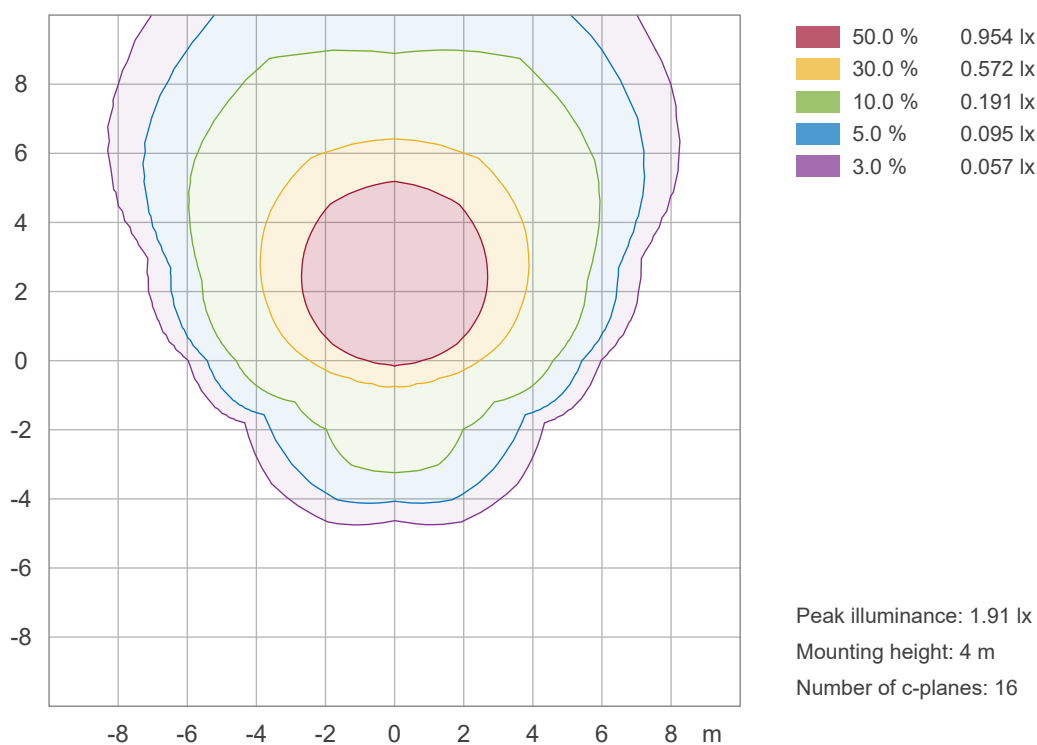


Linear intensity distribution diagram

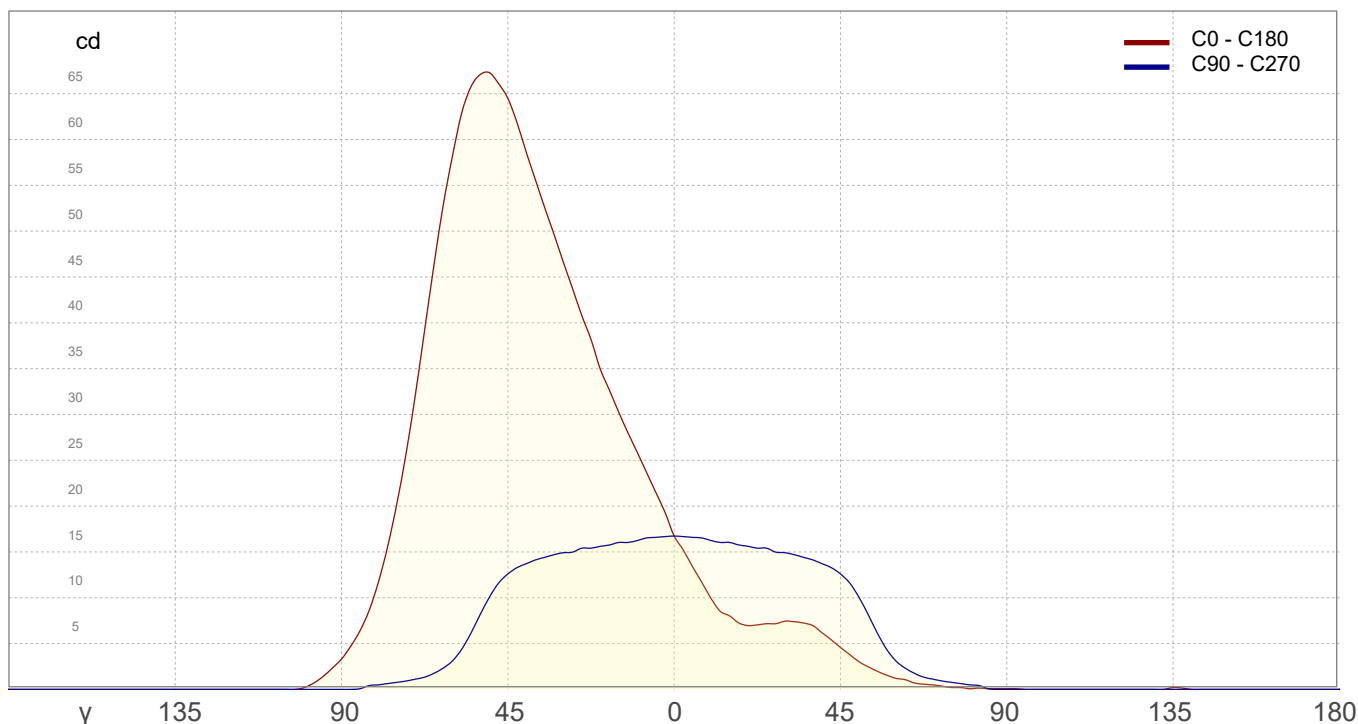

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B0 U1 G0

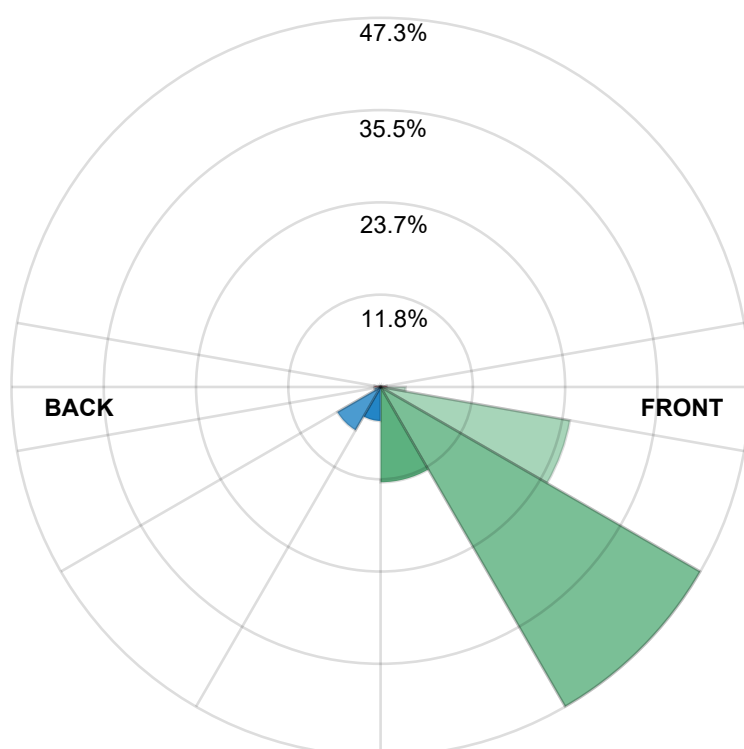

Forward Light

Low (0-30°)	11.4 lm	12.2%
Medium (30-60°)	44.2 lm	47.3%
High (60-80°)	23.0 lm	24.7%
Very High (80-90°)	3.0 lm	3.2%

Back Light

Low (0-30°)	4.1 lm	4.4%
Medium (30-60°)	6.0 lm	6.4%
High (60-80°)	0.8 lm	0.8%
Very High (80-90°)	0.1 lm	0.1%

Uplight

Low (90-100°)	0.7 lm	0.79%
High (100-180°)	0.0 lm	0.0%

Total

Sum	93.4 lm	100,0%
-----	---------	--------