

Light measurement report

Laboratory results

Print date 24-09-2026

Laboratory and Equipment

Test lab	GLLED
Spectrometer Manufacturer and Model	n/a, n/a – n/a
Measurement date	5/26/2026

Measurement Conditions

Tested c-planes	16
Tested gamma angles	73 – 2.50°
Input Power	2 W


Tested Light Source

Luminaire	TIGER EYE BLK 30K
Basic Luminous Shape	PANEL
Item No.	
Manufacturer	GARDEN LIGHT LED

Main Light Measurement Results

Output – Total Lumen (Up% / Down%)	102 lm – 0.0072% / 99.99%
Efficiency	51 lm/W
Peak Intensity	62.89 cd
Correlated Color Temperature, CCT	2700 K
Color Rendering Index	CRI 85.0

Polar light distribution diagram

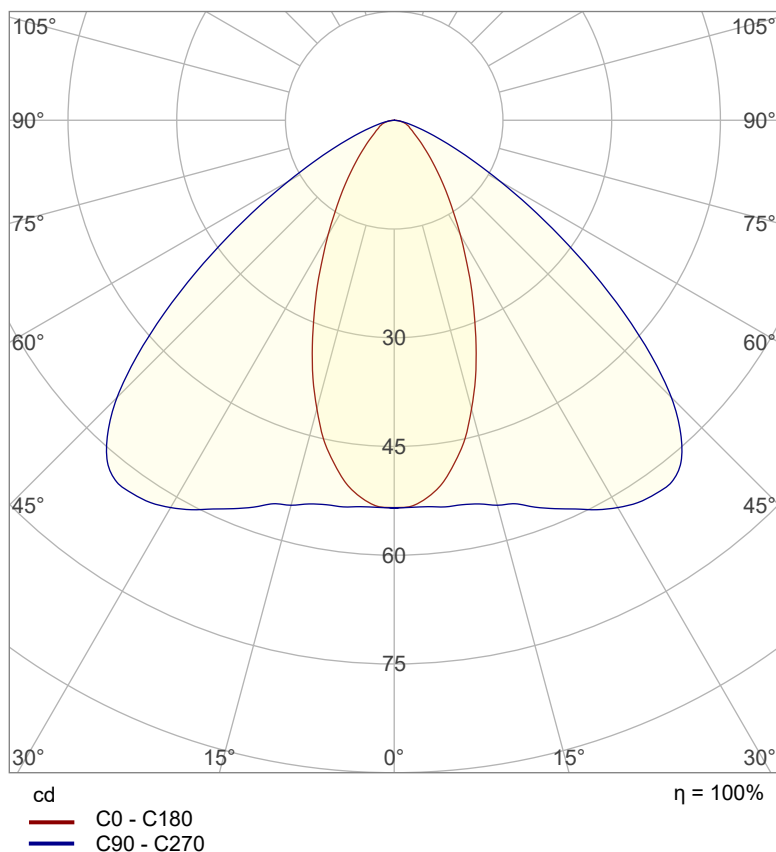


Light measurement report

Laboratory results


Print date 24-09-2026

Beam details

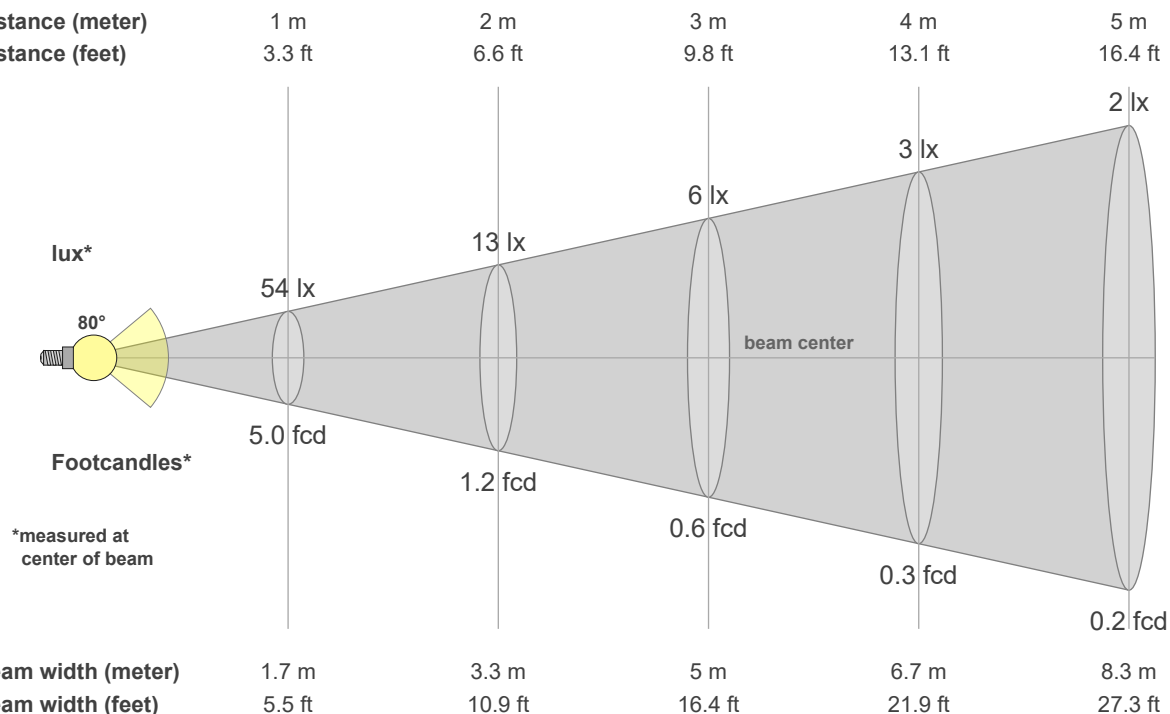


Luminaire budgetary diagram


LAMPS (number of lamps)

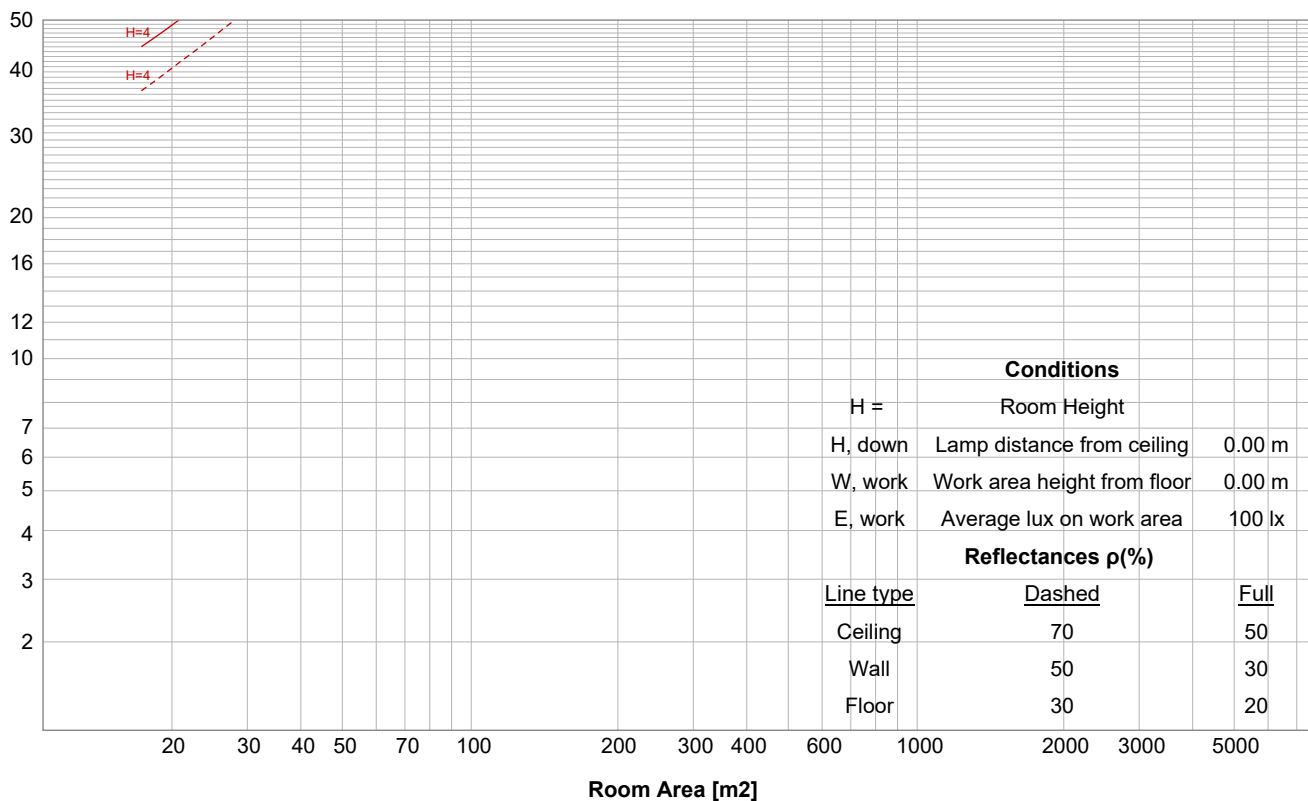


Iso-intensity Diagram (Iso-candela)

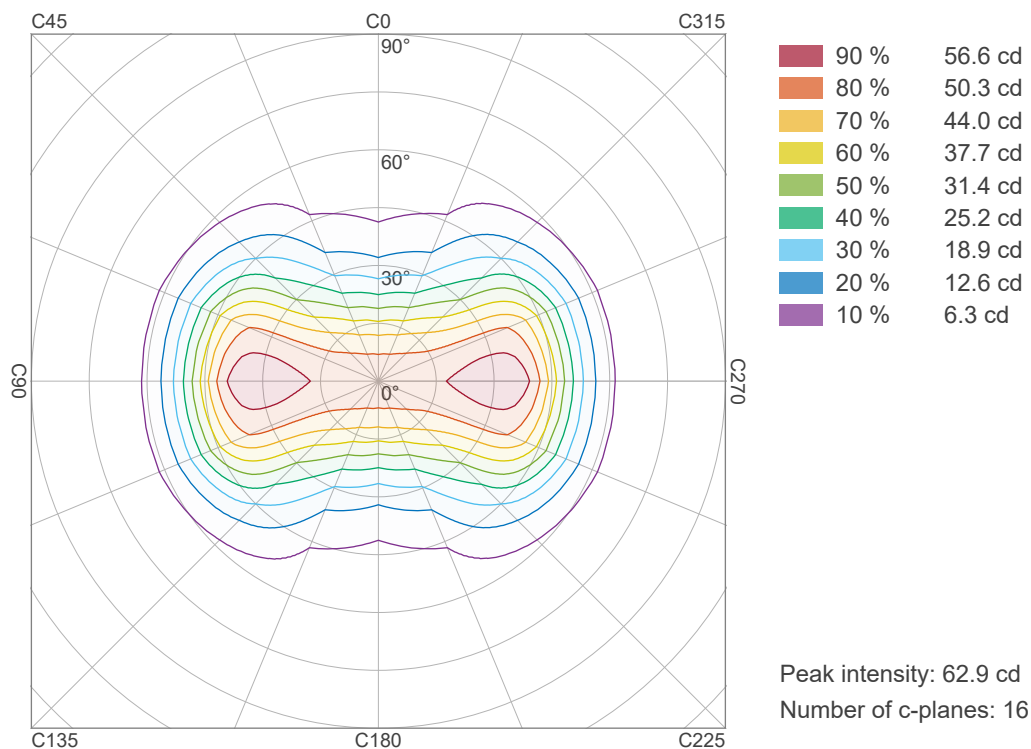

Iso-illuminance Diagram (Iso-lux)

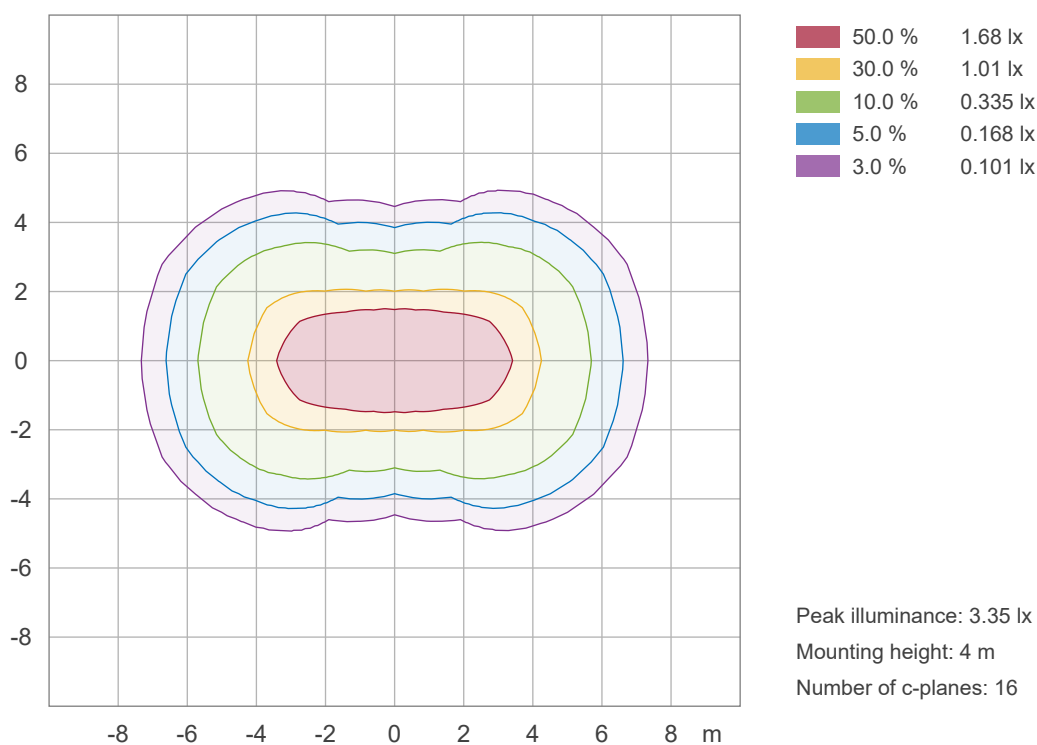


Linear intensity distribution diagram

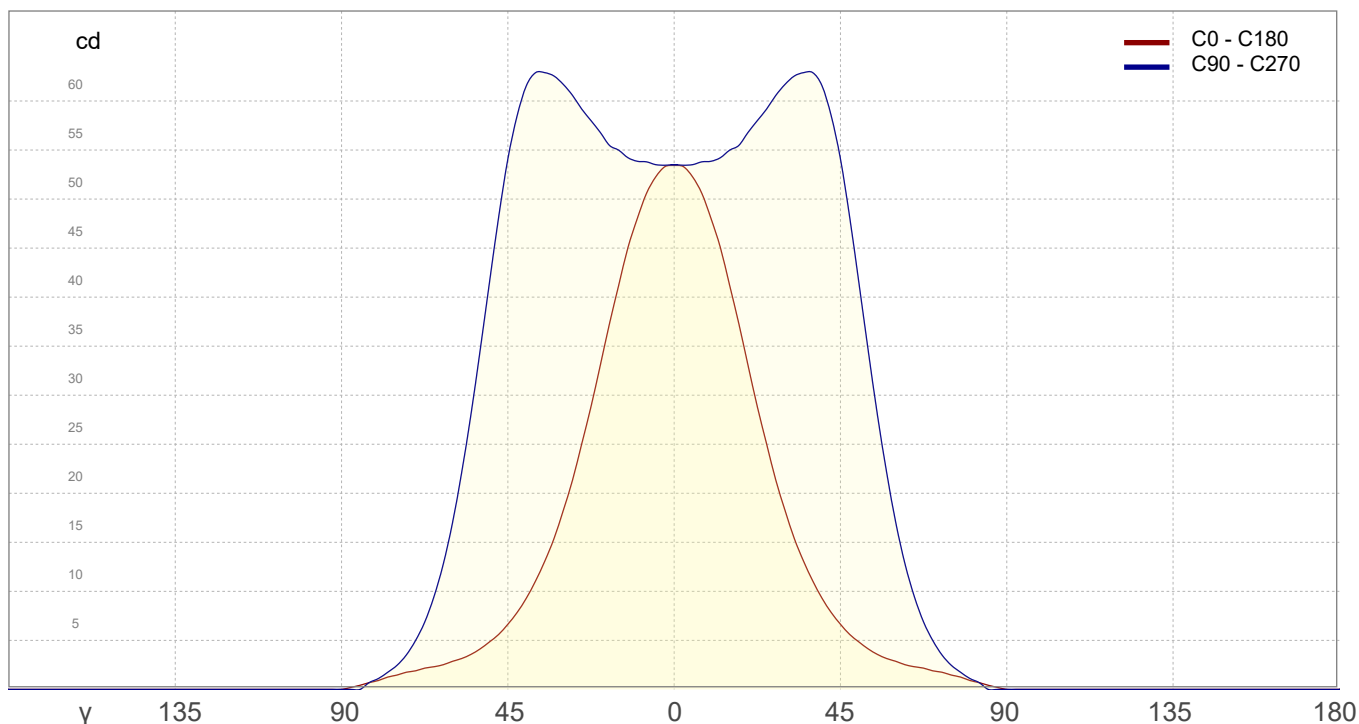

IESNA TM-15-07 Luminaire Classification System For Outdoor Luminaires

BUG rating B0 U0 G0

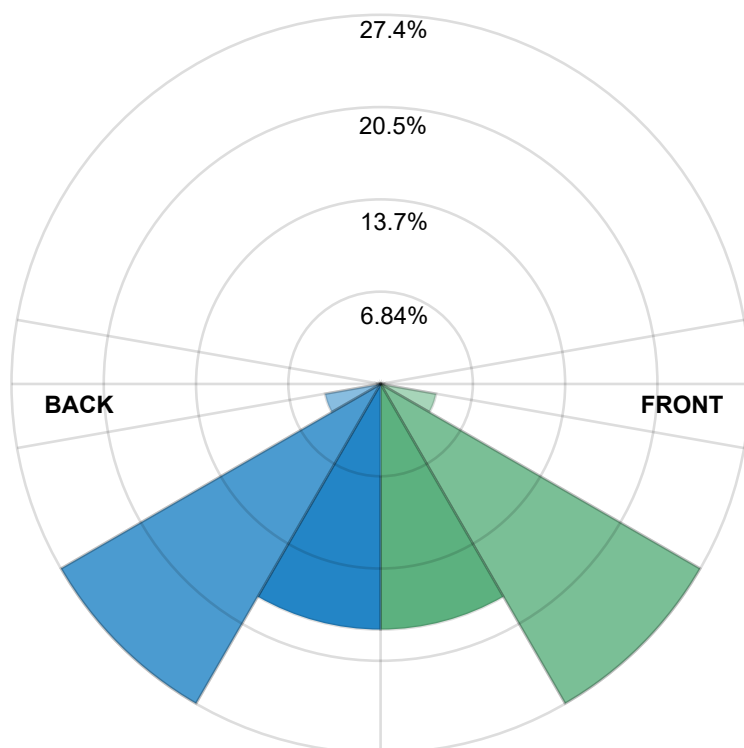

Forward Light

Low (0-30°)	18.6 lm	18.2%
Medium (30-60°)	27.9 lm	27.4%
High (60-80°)	4.3 lm	4.2%
Very High (80-90°)	0.3 lm	0.3%

Back Light

Low (0-30°)	18.6 lm	18.2%
Medium (30-60°)	27.9 lm	27.4%
High (60-80°)	4.3 lm	4.2%
Very High (80-90°)	0.3 lm	0.3%

Uplight

Low (90-100°)	0.0 lm	0.01%
High (100-180°)	0.0 lm	0.0%

Total

Sum	102.0 lm	100,0%
-----	----------	--------