



Garden Light LED
800-511-2099
www.gardenlightled.com

CCS SPOT LIGHT INSTALLATION INSTRUCTIONS

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Follow all NEC guidelines and local electrical codes.

NOTE: Use Garden Light LED transformers only - Garden Light LED will not repair or replace under warranty any luminaires or drivers that have been damaged as a result of using other manufacturer's equipment. **LISTED FOR OUTDOOR USE ONLY**

This Garden Light LED luminaire uses LED technology that has an operating voltage range of 10 - 15 Volts AC. Garden Light LED recommends using a 15 Volt tap.


WARNING - RISK OF ELECTRIC SHOCK: This luminaire must not be installed within 10FT (3.05m) of a pool, spa or fountain.

Low voltage wire is intended for shallow burial only and should be at a maximum depth of 6 inches (152mm).

LUMINAIRE INSTALLATION (see Figure 1.)

1. To prevent electrical shock, unplug transformer from the electrical outlet before installation or service of Luminaire.
2. Push Luminaire Lead through Stake Cap, thread Stake Cap onto the base of the Luminaire.
3. Drive the PVC Stake into the ground at the desired location (using a hammer if necessary) then remove it along with the dirt in the center of the PVC Stake. Shake the dirt out of the PVC Stake and reinsert the PVC Stake into the ground.
4. With the PVC Stake in place, push the Luminaire Lead into the cavity.
5. Route the Luminaire Lead through the slot on top of the PVC Stake. Place Stake Cap / Luminaire assembly on top of the PVC Stake, then adjust the Luminaire to the desired angle and tighten Leg Screw.
6. Secure Stake Cap / Luminaire assembly to the PVC Stake with Locking Screws.
7. Strip the two Luminaire Leads to the appropriate length and attach them to the Main Supply Lines using Listed Wet Location Wire Connectors. To protect the wire connection, route the wire in close proximity to the Luminaire.
8. Plug the transformer back into the electrical outlet and verify proper fixture operation. The fixture should power on and illuminate **white**.

Figure 1.

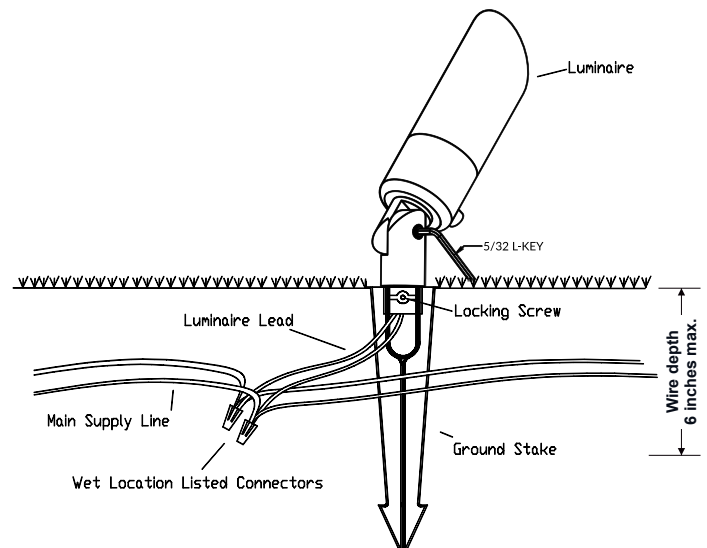

PAIR WITH CASAMBI APP

iOS



Android



1. Download and open the **Casambi App** (iOS or Android).
2. Enable Bluetooth on your mobile device.
3. Create a new Casambi network or join an existing network.
4. The new fixture will appear under **Nearby Devices**.
5. Select Identify. The fixture will blink briefly, allowing you to confirm its physical location.
6. Enter a descriptive name (for example: Front Entrance or Tree Uplight 03).
7. Tap the device and add it to the network.
8. Create groups and assign fixtures to scenes and animations as desired. Test functionality to ensure proper operation.

SUITABLE FOR INSTALLATION IN THE VERTICAL POSITION ONLY, AS DEPICTED ABOVE.

IF INSTALLED IN A MANNER NOT OUTLINED IN THIS DOCUMENT, FACTORY WARRANTY MAY BE VOID.

NOTES:

***Use only wire connectors Listed for wet locations. Contact Garden Light LED for suitable connectors. (800-511-2099)

***If additional wire is needed to connect the Luminaire to the low voltage transformer, contact Garden Light LED. (800-511-2099)

If you have any questions regarding installation or Garden Light LED luminaires, please call 800-511-2099 and our knowledgeable staff will assist you.