Spot Light - RGBW5.0 Series Installation Instructions

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Follow all NEC guidelines and local electrical codes.

NOTE: Use UL 1838 certified transformers only.

LISTED FOR OUTDOOR USE ONLY

This luminaire operates between 10-16 VAC. It is recommended to use a 15 Volt tap.

WARNING - RISK OF ELECTRIC SHOCK: This luminaire must not be installed within 10FT (3.05m) of a pool, spa or fountain.

Low voltage wire is intended for shallow burial only and should be at a maximum depth of 6 inches (152mm).

LUMINAIRE INSTALLATION (see Figure 1.)

- 1. To prevent electrical shock, unplug transformer from the electrical outlet before installation or service of Luminaire.
- 2. Run the Luminaire Leads through the top of the Ground Stake and thread Luminaire onto the Ground Stake.
- Drive the Luminaire / Ground Stake assembly into the ground at the desired location (using a hammer on the edge of the Ground Stake if necessary).
- 4. Strip the two Luminaire Leads to the appropriate length and attach them to the Main Supply Lines using Listed Wet Location Wire Connectors. To protect the wire connection, route the wire in close proximity to the Luminaire.
- 5. Install Luminaires within a maximum distance of 900 feet line-of-sight to ensure reliable operation.
- To control Luminaires via the app, stand within 15 to 150 feet of any fixture, depending on your mobile device.

GET THE APP






ADD A FIXTURE

- Create an Account: enter full name, email address and 4 digit PIN.
- 2. Complete Email Verification. Check your spam or junk folder if email not received within several minutes.
- 3. Log into App.
- 4. Click Add Device.
- 5. Scan QR Code on fixture.
- 6. Name fixture and Save.

You can now control your new fixture! Add all fixtures, then create Groups or Scenes.

Figure 1.

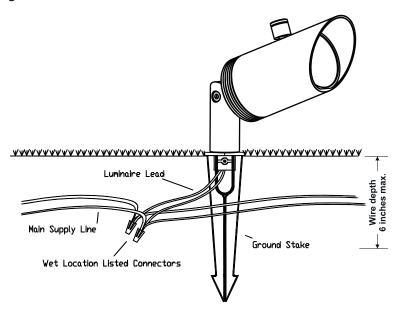

SUITABLE FOR UPWARD LIGHTING ONLY

IF INSTALLED IN A MANNER NOT OUTLINED IN THIS DOCUMENT, FACTORY WARRANTY MAY BE VOID.

***Use only wire connectors Listed for wet locations.

Area Light - RGBW5.0 Series Installation Instructions

SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE

Follow all NEC guidelines and local electrical codes.

NOTE: Use UL 1838 certified transformers only.

LISTED FOR OUTDOOR USE ONLY

This luminaire operates between 10-16 VAC. It is recommended to use a 15 Volt tap.

WARNING - RISK OF ELECTRIC SHOCK: This luminaire must not be installed within 10FT (3.05m) of a pool, spa or fountain.

Low voltage wire is intended for shallow burial only and should be at a maximum depth of 6 inches (152mm).

LUMINAIRE INSTALLATION (see Figure 1.)

- 1. To prevent electrical shock, unplug transformer from the electrical outlet before installation or service of Luminaire. Figure 1.
- 2. Run the Luminaire Leads through the top of the Ground Stake and thread Luminaire onto the Ground Stake.
- 3. Drive the Luminaire / Ground Stake assembly into the ground at the desired location (using a hammer on the edge of the Ground Stake if necessary).
- 4. Strip the two Luminaire Leads to the appropriate length and attach them to the Main Supply Lines using Listed Wet Location Wire Connectors. To protect the wire connection, route the wire in close proximity to the Luminaire.
- 6. To control Luminaires via the app, stand within 15 to 150 feet of any fixture, depending on your mobile device.

GET THE APP






ADD A FIXTURE

- Create an Account: enter full name, email address and 4 digit PIN.
- 2. Complete Email Verification. Check your spam or junk folder if email not received within several minutes.
- 3. Log into App.
- 4. Click Add Device.
- 5. Scan QR Code on fixture.
- 6. Name fixture and Save.

You can now control your new fixture! Add all fixtures, then create Groups or Scenes.

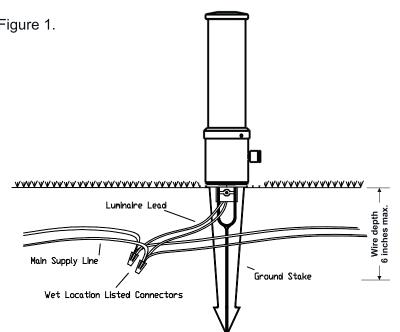

SUITABLE FOR INSTALLATION IN THE UPRIGHT / VERTICAL POSITION ONLY, AS DEPICTED ABOVE.

IF INSTALLED IN A MANNER NOT OUTLINED IN THIS DOCUMENT, FACTORY WARRANTY MAY BE VOID.

***Use only wire connectors Listed for wet locations.