

CW UP-DOWN LIGHT

DL 15-CW UDL | SPECIALTY LIGHT



CATEGORY

Specialty LED Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards



AB

BLK


BR

WHT

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Decks Railings Side to Side Up/Down Light Wall Sconce	6061 Aluminum Raw Brass	Internal Driver	10.5-18 VAC	Mounting Bracket Included	ULECC 22 AWG Tinned Copper Wire 46 Inch Length	80	UL1838 Low Voltage Landscape Lighting

PRODUCT DIMENSIONS

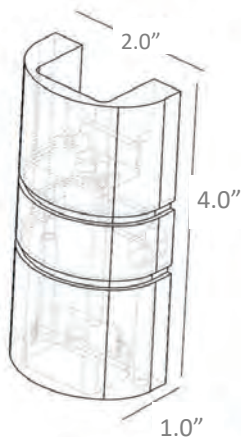

PHOTOMETRICS

*Complete IES files furnished upon request.

EQ / WATTS / VA / LUMENS

EQ / W / VA / LM
20 - 2W/2VA 115lm - 90lm

BEAM SPREAD & FINISH

BEAM SPREAD	FINISH
60° (Top) 130° (Bottom)	Architectural Bronze (AB) Black (BLK) White (WHT) Brass (BR)

POWER CONSUMPTION

COLOR TEMPERATURE	VA
3000K	2
2700K	2
5000K	2
AMB*	1
BLU	2
RBL	2
GRN	2
RED*	1

INDICATES STOCKED ITEMS

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information

FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver

