

P11

P11 | PATH LIGHT



CATEGORY

LED Path Light

LED LIFE EXPECTANCY | WARRANTY

TM-21 data: Greater than **80,000 hours** (20+ years at 8 hours a day)

20 Year Warranty

We run our fixtures **40%** cooler than LM-80 testing standards



BLK


AB

SSA

SPECIFICATIONS

APPLICATION	CONSTRUCTION	DRIVER SYSTEM	INPUT POWER	INSTALLATION	LEAD WIRES	CRI	CERTIFICATION
Pathway Walkway Patios Large Areas	6061 Aluminum	External Driver	10.5-18 VAC	LV180 Ground Stake Not Included or the Optional Surface Plate	ULECC 18 AWG Tinned Copper Wire 46 Inch Length	80	UL1838 Low Voltage Landscape Lighting

PRODUCT DIMENSIONS

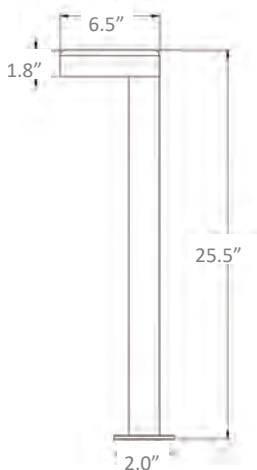

EQ / WATTS / VA / LUMENS

EQ / W / VA / LM

Low **35** - 3W/6VA - 340lm

Mid **50** - 6W/10VA - 540lm

High **100** - 12W/15VA - 1700lm

High - 15W/18VA - **2000lm**

High - 24W/28VA - **3000lm**

FINISH

BEAM SPREAD	FINISH
360°	Black (BLK) Architectural Bronze (AB) Stainless Steel Aluminum (SSA)

POWER CONSUMPTION

COLOR TEMPERATURE	VA
3000K (LOW) Mid - High	6
2700K Low - Mid - High	5
5000K Low - Mid - High	5
AMB* Low - Mid	6
BLU Low - Mid	5
RBL Low - Mid	5
GRN Low - Mid	5
RED* Low - Mid	4

PHOTOMETRICS

*Complete IES files furnished upon request.

ADDITIONAL INFO

- Built in USA | Tampa, FL
- For custom light output, contact your sales associate
- *Color Temperature Amber and Red are not Turtle Friendly; see our Turtle Friendly fixtures for more information
- Optional Accessories: 36' Post, Mounting Bracket (additional cost)

FEATURES

- Overdesigned heat sink and thermal management for longevity and consistency
- Dedicated LED fixtures
- Machined Metal Ingot, not Cast Material
- Proprietary design-enhanced and robust driver technology
- Remarkably tight binning process. 2-step MacAdam ellipse to ensure consistent light output and no variant light
- Surge protection built into every driver



Gar den Light LED | A Fixt ure f or L ife | 6112 Benjamin Road | Tampa, FL 33634 | 1.800. 511.2099 | 813.901.5595

*IN A CONTINUING PRODUCT IMPROVEMENT PROGRAM, GARDEN LIGHT LED RESERVES THE RIGHT TO MODIFY PRODUCT SPECIFICATIONS WITHOUT NOTICE.