




DL15-II | Mini Deck Light

PRODUCT DESCRIPTION

Ideal for decks, railings, wall mounts, step lighting, and fences.

The Mini Deck Light can be easily mounted under railings to illuminate steps or used on fences to provide safety. With the Micro Max integrated light engine, this fixture is small but powerful.

PRODUCT DIMENSIONS & BEAM SPREAD

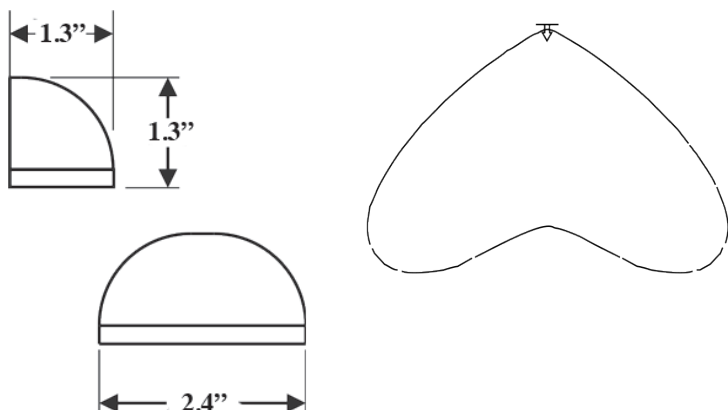

FEATURES & BENEFITS

- Built in the U.S.A.
- CNC-machined from 6061 aircraft-grade aluminum or raw brass.
- U.S.A. made light engine and driver.
- Built in surge protector.
- IP67 rated.
- CREE 2 step binned LEDs with L70 over 80,000 hours.

SPECIFICATIONS

- **Construction:** 6061 aircraft-grade aluminum or raw brass
- **Finishes:** Architectural Bronze (AB), Black (BLK), White (WHT), Stainless Aluminum (SSA), Brass (BR)
- **Lead Wire:** 60" 22 AWG tinned copper
- **Mounting:** Bracket included
- **Driver System:** Internal
- **Operating Voltage:** 10.5-18 VAC
- **CRI:** 80+
- **Beam Spread:** 120°
- **Accessories:** Deck light shrouds (not included)



POWER CONSUMPTION

COLOR TEMPERATURE	WATTAGE	VA	LUMENS
● 3000K*	1W	2VA	115LM

ADDITIONAL COLOR TEMPERATURE OPTIONS

- 2700K ● 5000K ● Amber ● Blue ● Royal Blue
● Green ● Red

WARRANTY

20 Year Limited Warranty

CERTIFICATIONS



Tested to UL standards.

**Indicates stocked items. Non-stocked items require 5-7 business days additional lead time, special order deposit and are non-refundable.*

IES files can be found at www.gardenlightled.com